

PXS8



Dual-Band
CDMA



Quad-Band
2G



Five-Band
3G



GPS



HSPA+



Extended
Temperature
Range



GPRS / EDGE
Class 12




USB 2.0



Full Voice
Support



RIL Driver

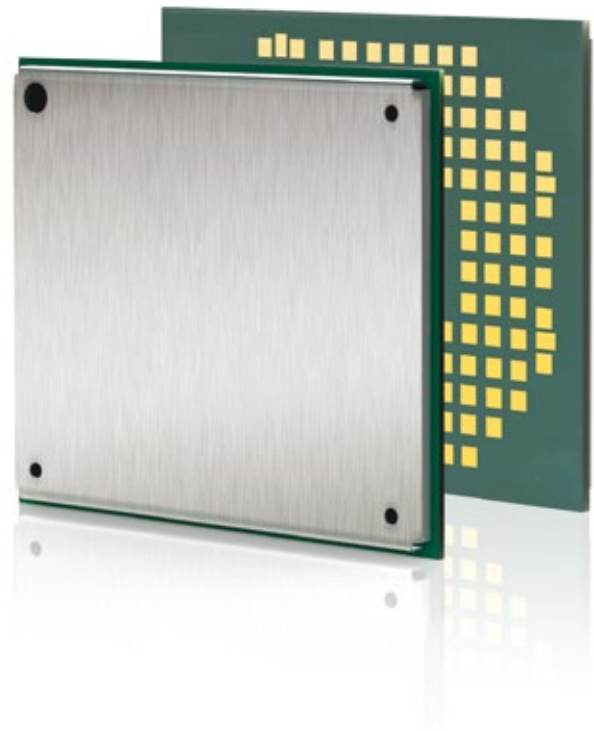

Cinterion PXS8

First M2M Multi Mode Module for CDMA and HSPA+

The new Cinterion PXS8 Multimode cellular machine-to-machine (M2M) module offers a smart solution for wireless connectivity today and in the future. PXS8 supports both CDMA and GSM/HSPA+ technology standards, eliminating the need for multiple designs and redundant hardware for worldwide M2M solutions.

Cinterion provides the PHS8 (HSPA+ only) and the PVS8 (CDMA only) module as well allowing room for growth to 4G cellular technology in the exact same form factor, to support highest flexibility and a future proof design for our customers.

With the latest technology, PXS8 is optimized for high bandwidth and allows speeds up to 14.4 Mbps for downlink and 5.7 Mbps for uplink. By enabling a full range of M2M functions and features, the PXS8 offers an ideal communication solution for the challenging

requirements of a variety of global M2M applications, such as ruggedized mobile computing, security solutions or medical equipment. Two antenna pads enable diversity support allowing PXS8 to provide improved dataspeeds even under fluctuating 3G network conditions. The GPS antenna path is optimized for elimination of blanking on GPS for consistent performance.

Cinterion's unique type of LGA technology enables optimized heat dissipation that prevents warpage. It gives our customers the freedom to select the most beneficial soldering paste for each individual application.

Like all Cinterion products, the PXS8 comes with full type approval (FTA) and is certified by the largest carriers worldwide.



По вопросам продаж и поддержки обращайтесь:

Архангельск (8182)63-90-72

Астана +7(7172)727-132

Белгород (4722)40-23-64

Брянск (4832)59-03-52

Владивосток (423)249-28-31

Волгоград (844)278-03-48

Вологда (8172)26-41-59

Воронеж (473)204-51-73

Екатеринбург (343)384-55-89

Иваново (4932)77-34-06

Ижевск (3412)26-03-58

Казань (843)206-01-48

Калининград (4012)72-03-81

Калуга (4842)92-23-67

Кемерово (3842)65-04-62

Киров (8332)68-02-04

Краснодар (861)203-40-90

Красноярск (391)204-63-61

Курск (4712)77-13-04

Липецк (4742)52-20-81

Магнитогорск (3519)55-03-13

Москва (495)268-04-70

Мурманск (8152)59-64-93

Набережные Челны (8552)20-53-41

Нижний Новгород (831)429-08-12

Новокузнецк (3843)20-46-81

Новосибирск (383)227-86-73

Орел (4862)44-53-42

Оренбург (3532)37-68-04

Пенза (8412)22-31-16

Пермь (342)205-81-47

Ростов-на-Дону (863)308-18-15

Рязань (4912)46-61-64

Самара (846)206-03-16

Санкт-Петербург (812)309-46-40

Саратов (845)249-38-78

Смоленск (4812)29-41-54

Сочи (862)225-72-31

Ставрополь (8652)20-65-13

Тверь (4822)63-31-35

Томск (3822)98-41-53

Тула (4872)74-02-29

Тюмень (3452)66-21-18

Ульяновск (8422)24-23-59

Уфа (347)229-48-12

Челябинск (351)202-03-61

Череповец (8202)49-02-64

Ярославль (4852)69-52-93

сайт: www.cinterion.nt-rt.ru || эл. почта: cnr@nt-rt.ru

General Features

- Five-Bands UMTS (WCDMA/FDD)
Bands: 800, 850, 900, 1900 and 2100 MHz
UMTS / HSPA+, 3GPP release 6 / 7
Rx-Diversity with Equalizer (Type 3i),
Enhanced F-DPCH, DTX, DRX, SCH-IC
- Quad-Band GSM
Bands: 850, 900, 1800, 1900 MHz
GSM / GPRS / EDGE, 3GPP release 99 / 4
Improved SAIC
- Dual Band CDMA2000 Bands: BC0 & BC1
(800/1900 MHz)
3GPP2: 1xAdvanced, EV-DO Rev. A
QLIC, Rx-Diversity, Equalizer
- SIM Application Toolkit, 3GPP release 99
- Data, Voice and TTY support
- Control via standardized and extended AT
commands (Hayes, TS 27.007, TS 27.005)
- TCP/IP stack access via AT commands
- Supply voltage range 3.3 - 4.2 V, highly optimized
for minimal power consumption
- Dimension: 29 x 33 x 2 mm
- Extreme Operation Temperature Ranges
Normal operation: -30°C to +65°C
Restricted operation: -40°C to +85°C
- RoHS and WEEE complian

Specifications

- HSDPA Cat.10 / HSUPA Cat.6 data rates
DL: max. 14.4 Mbps, UL: max. 5.76 Mbps
- EDGE Class 12 data rates
DL: max. 237 kbps, UL: max. 237 kbps
- GPRS Class 12 data rates
DL: max. 85.6 kbps, UL: max. 85.6 kbps
- EV-DO Rev.A data rates
FL: max. 3.1 Mbps, RL: max. 1.8 Mbps
- 1 x Advanced data rates
FL: max. 307.2 kbps, RL: max. 307.2 kbps
- CSD data transmission up to 14.4 kbps, V.110
- SMS text and PDU mode, Phonebook support
- Voice support, optimized for high quality handset,
headset and hands-free telephony with dual micro-
phone support for suppression of non-stationary
background noise

Additional Functionality

- USB interface supports multiple composite modes and
a Linux-/Mac- compliant mode
- Firmware update via USB and serial interface
- A-GPS support: standalone, XTRA[®], CP E911, Protocol
according NMEA-0183 V2.3, Tracking Sensitivity better
than -158dBm
- Multiplexer according 3GPP TS 27.010

Interfaces (SMT-LGA)

- 2 pads for WAN Diversity-Antennas
- Pad for an active GPS Antenna
- Analog audio interface (balanced)
- Digital audio interfaces (PCM or I²S)
- USB 2.0 HS interface up to 480 Mbps
- High speed serial interface up to 920 kbps
- UICC and U/SIM card interface 1.8V and 3V
- Pads for Emergency-Off, Ignition, Network Status
Indication, Low Current Indication

Drivers


- NDIS/USB/MUX driver for Microsoft[®]
Windows XP[™], Windows Vista[™] and Windows 7[™]
- RIL/NDIS/USB/MUX driver for devices based on
Microsoft[®] Windows Embedded Handheld[™]
- USB/MUX driver for Microsoft[®] Windows
Embedded Compact[™]
- CDC-ACM compliant mode for Linux

Approvals

- R&TTE, GCF, CE, FCC, PTCRB, UL, IC, CCF
- Verizon Wireless approval (CDG1/CDG2)
- AT&T (for Rel.02) and additional local approvals and
network operator certifications

**For detailed specification please see hardware
interface description.**

First M2M Multi Mode Module for CDMA and HSPA+

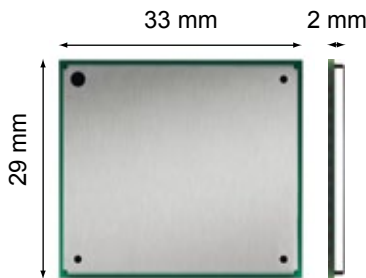

Multi Mode CDMA / HSPA+

The PXS8, the new flagship multi-mode module for M2M, combines 3GPP and 3GPP/2 technology for worldwide cross-network roaming between CDMA and HSPA+ networks with a single M2M module.

Future Proof Design

At just 2 mm in height, PXS8 is ideal for integration in the slimmest and most size constraint M2M solutions. With the latest long-life chipset and a footprint prepared for forthcoming LTE modules, PXS8 provides longevity and a reliable path to the future for any high-bandwidth M2M applications.



Cinterion Global Support

Local engineers, a competent helpdesk, a dedicated team of R&D specialists and an advanced development center are the hallmarks of our leading support offer.

The Cinterion support includes:

- Personal design-in consulting for hardware and software
- Extensive RF test capabilities
- GCF/PTCRB conform pretests to validate approval readiness
- Guidelines for local approvals and acceptances
- Regular training workshops



По вопросам продаж и поддержки обращайтесь:

Архангельск (8182)63-90-72

Астана +7(7172)727-132

Белгород (4722)40-23-64

Брянск (4832)59-03-52

Владивосток (423)249-28-31

Волгоград (844)278-03-48

Вологда (8172)26-41-59

Воронеж (473)204-51-73

Екатеринбург (343)384-55-89

Иваново (4932)77-34-06

Ижевск (3412)26-03-58

Казань (843)206-01-48

Калининград (4012)72-03-81

Калуга (4842)92-23-67

Кемерово (3842)65-04-62

Киров (8332)68-02-04

Краснодар (861)203-40-90

Красноярск (391)204-63-61

Курск (4712)77-13-04

Липецк (4742)52-20-81

Магнитогорск (3519)55-03-13

Москва (495)268-04-70

Мурманск (8152)59-64-93

Набережные Челны (8552)20-53-41

Нижний Новгород (831)429-08-12

Новокузнецк (3843)20-46-81

Новосибирск (383)227-86-73

Орел (4862)44-53-42

Оренбург (3532)37-68-04

Пенза (8412)22-31-16

Пермь (342)205-81-47

Ростов-на-Дону (863)308-18-15

Рязань (4912)46-61-64

Самара (846)206-03-16

Санкт-Петербург (812)309-46-40

Саратов (845)249-38-78

Смоленск (4812)29-41-54

Сочи (862)225-72-31

Ставрополь (8652)20-65-13

Тверь (4822)63-31-35

Томск (3822)98-41-53

Тула (4872)74-02-29

Тюмень (3452)66-21-18

Ульяновск (8422)24-23-59

Уфа (347)229-48-12

Челябинск (351)202-03-61

Череповец (8202)49-02-64

Ярославль (4852)69-52-93

сайт: www.cinterion.nt-rt.ru || эл. почта: cnr@nt-rt.ru